

Oval Undermount Bowl

Undercounter Vanity

Features

- Genuine Vitreous China
- Undercounter
- ADA-Compliant
(when installed according to ADA mounting guidelines)
- Single Compartment
- Oval Shaped Bowl

Available Colors



Dimensions

Outer: 17-1/8" x 14" x 7-3/4"
 Inner: 15-1/4" x 12" x 6"

Product Specification

The undercounter vanity sink shall be 17-1/8" in width and 14" in length, with an overall depth of 7-3/4" and a bowl depth of 6". Sink shall be a single compartment with oval bowl, composed of Vitreous China. Sink shall be ADA-Compliant when installed according to ADA mounting guidelines. Sink shall comply with ASME A112.19-2-2013, and CSA B45.1-13 ceramic plumbing fixtures. Sink shall be Continental Model "Acorn".

TECHNICAL INFORMATION



Fixture*	
Basin Area	14-7/8" x 11-7/8"
Water Depth	6"
Drain Hole	1-7/8" D
*Approximate measurements for comparison only.	

Please note: All porcelain sinks are fired at a very high temperature; final dimensions may vary slightly.



Codes / Standards Applicable

Specified model meets or exceeds UPC and ASME certifications

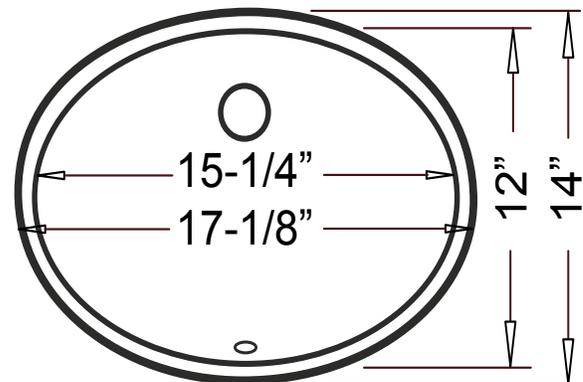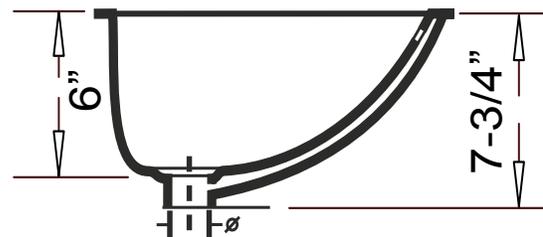

Rectangle Undermount

Undermount Vanity

Features

- Genuine Vitreous China
- Undermount Installation
- ADA-Compliant
(when installed according to ADA mounting guidelines)
- Single Compartment
- Rounded Rectangular Shaped Bowl



Available Colors



Dimensions

Outer: 20-7/8" x 14-5/8" x 8-1/4"
 Inner: 18-1/2" x 12-3/8" x 6-1/4"

Product Specification

This undermount vanity sink shall be 20-7/8" in length and 14-5/8" in width, with an overall depth of 8-1/4" and an inner bowl depth of 6-1/4". Sink shall be a single compartment with rounded rectangular bowl, composed of Vitreous China. Sink shall be ADA-Compliant when installed according to ADA mounting guidelines. Sink shall be Continental Model "Trench".

TECHNICAL INFORMATION

Fixture*	
Basin Area	18-1/2" x 12-3/8"
Water Depth	6-1/4"
Drain Hole	1 7/8" D
*Approximate measurements for comparison only.	

Please note: All porcelain sinks are fired at a very high temperature; final dimensions may vary slightly.

Codes / Standards Applicable

Specified model meets or exceeds UPC certification

